

ACCESSORIES & DOOR FURNITURE

Assa offers the widest range of hardware in the market for secure, functional and decorative use.

The range also includes a wide selection of emergency exit hardware for applications with high requirements.



Epok lever handles have the following features:

The sprung handles are equipped with a built-in return spring that helps the return spring of the lock case to keep the handle in a horizontal position.

This feature is by definition not included in the unsprung handles.

Rose Ø 52 mm.

The two handle halves are linked by an exchangeable through-going square spindle and screws. The square spindle and the screws are available in different lengths for different door thicknesses.

Material: Brass

Handles without return springs fits Assa modular/Evolution lock cases irrespective of the angle from the horizontal plane (not 35 mm backset).

When assembled with lock case 446 use 4 mm Ø screw instead of the standard 5 mm Ø.

Sprung Lever Handles, Epok-series

1899

The design of this lever handle is new but with an inheritance from the turn of the last century. It's a combination of the drop shaped lever handles and the egg shaped knobs, both very popular at the time. In addition the handle features a T-shaped neck. The heavy image and slightly exaggerated design is ideal for use in both old and new houses built in Art Nouveau or national romantic style. Polished brass is probably the best choice of finish when it comes to renovating old buildings. In contemporary buildings, the coloured handles provide lots of other possibilities.

Finish

Handle neck: nickel-plated, satin chrome, bright chrome, satin brass, polished brass and miralloy.

Grip: white (RAL 1013), black (RAL 8022) or green (RAL 6028) powder lacquered alternatively nickel-plated, satin chrome, bright chrome, satin brass, polished brass or miralloy.



Polished brass



Polished brass / black



Polished brass / green



Polished brass / white



Satin brass



Bright nickel



Polished brass



Brown anodised

1918

This lever handle clearly shows influences from this time, although it's slightly heavier and the design is more distinct. Thanks to the timeless elegance of the handle it may be used in practically any building, as long as the architecture is similarly elegant and timeless. Suitable for use in all modern-style houses with the exception of those that represent extreme functionalism.

Finish

Nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy.



Sprung Lever Handles, Epok-series

1930

This lever handle is in a way a cross-breed between two previously incompatible design periods. Partly 1880 and 1890's bud-like tubular handle and the 1930's simple modernistic handle. With a brass neck and black / white grip the handle suits the style of the late 19th century. With a bright neck and black grip it suits the 1930's functionalism and its modern successors. The combination of bright neck and white grip brings us to the 1940's, whereas simple bright or the combination bright/brass are more modernistic. Hence, by mixing colour and finish this handle can suit many different periods.

Finish

Handle neck: nickel-plated, satin chrome, bright chrome, satin brass, polished brass and miralloy.

Grip: white (RAL 1013), black (RAL 8022) or green (RAL 6028) powder lacquer alternatively nickel-plated, satin chrome, bright chrome, satin brass, polished brass or miralloy.



1956

This lever handle was created during a short period of time. Initially the designer took some clay in his hand and, without looking, formed it until it felt right. The handle in production today basically has the same shape as that clay model. There is a clear resemblance to Assa lever handle 696 and the heritage of the 1950's design is evident. To achieve a more modern design, the shapes of the handle have been somewhat exaggerated. This handle is well suited for all architectural trends of the 1950's and onwards.

Finish

Nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy.





Unsprung Lever Handles, Epok-series

1905



Satin brass



Miralloy



Polished brass



Brown anodised

This lever handle has been inspired by the most common Art Noveau handles, but it's slightly heavier and more distinct. It's ideal for use in interior doors.

Finish

Nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy.

1923



Satin brass



Chrome



Polished brass



Brown anodised

This lever handle reflects the classicistic style of the 1920's. With the rounded spoon-shape it suits both interior and exterior doors.

Finish

Nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy.



Ursprung Lever Handles, Epok-series

1935

A beautifully shaped lever handle which has become a favourite of many. The clear and straightforward design refers to the period when the streamline form became popular.

Finish

Nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy.



1949

The design of this lever handle is for many recognized as a classic Assa handle. This particular model is slightly lighter and has a diamond-shaped grip that fits the hand well. Suitable for both interior and exterior doors.

Finish

Nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy.





Sprung Lever Handles, Classic-series

6640

A classic lever handle from the 1950's and 1960's that is still very popular. A great design that will last for many years to come and suitable for a great range of environments.

Features

- Material: Brass
- Finish: nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy
- Built-in return spring that supplements the handle follower spring in the lock case and assists the handle to stay in a horizontal position
- Bolt-through fixing strengthens the door
- Standard delivery for 40-57 or 58-75 mm door thickness
- Rose: 52 mm Ø
- The two handle halves are linked by an exchangeable square spindle and screws in different lengths for different door thicknesses



Satin brass



Miralloy



Polished brass



Brown anodised

6696

This is another classic Assa lever handle from the 1950's and 1960's. The handle has a discreet and thorough design. Function is important, but not to the expense of the care for human aspects. Therefore it is timeless and suits all applications.

Features

- Material: Brass
- Finish: nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy
- Built-in return spring that supplements the handle follower spring in the lock case and assists the handle to stay in a horizontal position
- Bolt-through fixing strengthens the door
- Standard delivery for 40-57 or 58-75 mm door thickness
- Rose: 52 mm Ø
- Two lever handle halves are linked by an exchangeable square spindle and screws available in different lengths for different door thicknesses



Satin brass



Bright nickel



Polished brass



Brown anodised

6616

This lever handle represents our most minimalistic design. It's a very simple and modern handle that suits buildings with plain decor, such as hospitals and institutions.

Features

- Material: Brass
- Finish: Nickel, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy
- Built-in return spring that supplements the handle follower spring in the lock case and assists the handle to stay in a horizontal position
- Bolt-through fixing strengthens the door
- Rose: 52 mm Ø
- Handle: 16 mm Ø
- The two handle halves are linked by an exchangeable square spindle and screws in different lengths for different door thicknesses



Polished chrome



Polished brass



Satin chrome



Sprung Lever Handles, Classic-series

6647

This lever handle was designed by Carl Arne Breger in the 1970's. The handle reflects the rational and slightly square-shaped design that characterises that time. With the discreet but distinguished design it's a modern day classic.

Features

- Material: Brass
- Finish: Nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy
- Built-in return spring that supplements the handle follower spring in the lock case and assists the handle to stay in a horizontal position
- Bolt-through fixing strengthens the door
- Standard delivery for 40-57 or 58-75 mm door thickness
- Rose: 52 mm Ø
- The two handle halves are linked by an exchangeable square spindle and screws in different lengths for different door thicknesses



6638

The design of this lever handle reflects both baroque and rococo, yet in a simpler manner to suit architecture with less curved forms.

Features

- Material: Brass
- Finish: nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy
- Built-in return spring that supplements the handle follower spring in the lock case and assists the handle to stay in a horizontal position
- Bolt-through fixing strengthens the door
- Standard delivery for 40-57 or 58-75 mm door thickness
- Rose: 52 mm Ø
- The two handle halves are linked by an exchangeable square spindle and screws in different lengths for different door thicknesses





Polished brass



Nickel

6611

Once again our designer let the functionalistic mindset of the 1950's inspire him to create this lever handle. The result came to be a rather simple handle where the distinct shapes and the multidimensional surface makes an exciting image. A modern day classic?

Features

- Material: Brass
- Finish: Nickel, satin chrome, bright chrome, satin brushed brass, polished brass, brown anodised or miralloy
- Built-in return spring that supplements the handle follower spring in the lock case and assists the handle to stay in a horizontal position
- Bolt-through fixing strengthens the door
- Standard delivery for 40-57 or 58-75 mm door thickness
- Rose: 52 mm Ø
- The two handle halves are linked by an exchangeable 8 mm square spindle and screws in different lengths for different door thicknesses

6670

The simplicity and the slender image of this lever handle pleases both the eye and the hand.

Features

- Material: Brass
- Finish: Nickel, satin chrome, bright chrome, satin brushed brass, polished brass, brown anodised or miralloy
- Built-in return spring that supplements the handle follower spring in the lock case and assists the handle to stay in a horizontal position
- Bolt-through fixing strengthens the door
- Standard delivery for 40-57 or 58-75 mm door thickness
- Rose: 52 mm Ø
- The two handle halves are linked by an exchangeable 8 mm square spindle and screws in different lengths for different door thicknesses



Satin brass



Satin chrome

6680

This is a robust lever handle with a discreet design which makes it suitable for most environments.

Features

- Material: Brass
- Finish: Nickel, satin chrome, bright chrome, satin brushed brass, polished brass, brown anodised or miralloy
- Built-in return spring that supplements the handle follower spring in the lock case and assists the handle to stay in a horizontal position
- Bolt-through fixing strengthens the door
- Standard delivery for 40-57 or 58-75 mm door thickness
- Rose: 52 mm Ø
- The two handle halves are linked by an exchangeable square 8 mm spindle and screws in different lengths for different door thicknesses



Satin brass



Satin chrome



The Assa product range is continuously improving.

Please visit our homepage www.assa.se
for the latest information
regarding our product range.



Unsprung Lever Handles, Classic-series

640

The classic Assa lever handle from the 1950's and 1960's in its original design. The handle is well-known and features thorough and careful design.

Features

- Material: Brass
- Finish: Nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy
- Bolt-through fixing strengthens the door
- Standard delivery for 40-57 or 58-75 mm door thickness
- Rose: 52 mm Ø
- The two handle halves are linked by an exchangeable square spindle and screws in different lengths for different door thicknesses



Satin brass



Miralloy



Polished brass



Brown anodised

696

The classic Assa lever handle from the 1950's and 1960's in its original design. The handle is well-known and features thorough and careful design.

Features

- Material: Brass
- Finish: Nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy
- Bolt-through fixing strengthens the door
- Standard delivery for 40-57 or 58-75 mm door thickness
- Rose: 52 mm Ø
- The two handle halves are linked by an exchangeable square spindle and screws in different lengths for different door thicknesses



Nickel



Brown anodised



Polished brass

ASSA 640 and ASSA 696 is also available for DIN-standard lock cases.



Unsprung Lever Handles, Classic-series

5602

This is a very simple and elegant brass handle. It's primarily designed for use in light interior doors within the residential sector, where elegance and traditional touch is sought at a reasonable cost.

Features

- Material: Brass
- Finish: Nickel-plated, bright chrome, satin brass, polished brass or brown anodised
- Standard delivery for 36-52 mm door thickness.
- Bolt-through fixing
- The two handle halves are linked by an exchangeable square spindle and screws in different lengths for different door thicknesses



Satin brass



Miralloy



Brown anodised

5614

This is a simplified 'basic' handle. The discreet design doesn't draw that much attention to itself and therefore suits practically any environment.

Features

- Material: Zinc
- Finish: Bright chrome or miralloy
- Bolt-through fixing with two screws and hardened nipples
- For 40 mm door thickness
- Screws: 4mm Ø
- The two handle halves are linked by a square spindle
- For use in light interior doors within the residential sector.



Chrome

Unsprung Lever Handles, Vinga-series

Asa 73

Asa 73 Vinga is a lever handle of the Vinga series intended for light interior doors within the residential sector. The lever handle can be combined with other french door and window accessories of the Vinga series.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome or miralloy
- Bolt-through fixing with two screws, 5 mm Ø, and nipples
- Rose: 52 mm Ø
- For 40 mm door thickness
- For use in light interior doors within the residential sector.



Bright chrome



All lever handles of the Nord-series have the following features:

Intended for light interior doors within the residential sector

Without return spring

Rose: 52 mm Ø

Bolt-through fixing with two screws 5/32" Ø

For 40 mm door thickness

The two handle halves are linked by a square spindle

Material: Brass

Unsprung Lever Handles, Nord-series

621 Båstad

Originally this lever handle was bigger and made for large gates, but after it was re-designed and made smaller during the period between 1900 and 1930 it became very common. The design isn't linked to a specific period of time and therefore it came to be used during both the periods of Art nouveau and national romantics, and also during a major part of the 1920's classicism. The design of this lever handle makes it fit most environments and is another a blockbuster. Intended for light interior doors within the residential sector.

Finish: Polished brass



623 Enskede

This is a typical lever handle that was used for interior panel doors in common residential areas during the 1920's. It belongs among red paint, glassed-in verandas, porches and small town idyllic scenery. Intended for light interior doors within the residential sector.

Finish: Satin chrome, polished brass or satin brass



626 Gåshaga

This is as simple as a lever handle gets. Exclude all the unnecessary parts and you will have Gåshaga! The discreet design of this lever handle is the perfect solution when it comes to post functionalism and minimalism. Intended for light interior doors within the residential sector.

Finish: Bright chrome





Sprung Lever Handles, Stainless Steel

8650, 8665, 8670, 8680, 8685, 8690

Our stainless steel lever handles, pull handles and accessories are ideal for modern public areas such as institutions and offices. The stainless material is highly resistant to corrosion and severe air pollutants, and is recommended for use in environments with vast hygienic requirements. Thumbturns, toilet- and cylinder accessories are available in the same design series to complement the Assa stainless steel lever handles.

Features

- Finish: Satin brushed stainless steel
- Standard rose with return spring that supplements the handle follower spring in the lock case and assists the handle to return to horizontal position
- Bolt-through fixing with 5 mm Ø screws and nipples strengthens the door
- The two handle halves are linked by an exchangeable square spindle and screws in various lengths for different door thicknesses
- Available with an independent clip-on rose for hidden screw attachment (Model 8680 and 8690 excluded)
- Rose: 53 mm



8650



8665



8670



8680



8685



8690

Unsprung Lever Handle, Stainless Steel

408

This is a lever handle made of stainless steel without a return spring.

Features

- All visible parts in satin brushed stainless steel
- Without return spring
- Independent clip-on rose for hidden screw attachment
- The two handle halves are linked by an exchangeable square spindle for various door thicknesses
- Rose: 50,5 mm Ø
- For use in light interior doors within the residential sector.



408

NOTE! Doesn't fit lock cases with Split-Spindle function.



167

Recommended application

For doors and hatches.

Features

- Material: Brass
- Finish: nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy
- Knob: 50 mm Ø
- Rose: 52 mm Ø

Function

- The two knobs are linked by an exchangeable square spindle for various door thicknesses
- Can be combined with Assa modular locks



496

Recommended application

For doors and hatches.

Features

- Material: Brass
- Finish: nickel-plated, satin chrome, bright chrome, satin brass, polished brass, brown anodised or miralloy
- Knob: 50 mm Ø
- Rose: 52 mm Ø

Function

Non-turnable pull knob.



7801, 7802, 7811, 7812, 7902, 7912

Recommended application

For mounting on the inside of french doors and windows with espagnolettes. Suitable for all types of buildings. Also recommended for use in cabinet and closet doors, electric cabinets etc. with alternative espagnolettes.

Features

- The handle is available in four versions;
 - Curved right or left
 - Straight right or left
- Lock case and handle are made of zinc
- Finish: Bright chrome or satin chrome

Function

- Affects the locking mechanism by the cylinder, which in locked position blocks the handle
- Lockable espagnolette handle for interior mounting on a french door or a window. Complemented with an oval Assa cylinder.



- | | |
|------|---|
| 7801 | Right alt. left straight handle, key removable in locked position |
| 7802 | Right alt. left straight handle, key removable in locked or unlocked position |
| 7811 | Right alt. left curved handle, key removable in locked position |
| 7812 | Right alt. left curved handle, key removable in locked or unlocked position |

Lockable espagnolette handle for interior mounting on a french door or a window. Complemented with an oval Assa cylinder.

- | | |
|------|---|
| 7902 | Right alt. left straight handle, key removable in locked or unlocked position |
| 7912 | Right alt. left curved handle, key removable in locked or unlocked position |

Outside handle

- | | |
|-------|-----------------------------|
| 17911 | Handle, non-lockable, right |
| 17912 | Handle, non-lockable, left |

Recommended accessories

- | | |
|-----|---|
| 833 | Handle coupling. Used when handles are to be fitted on both sides in a single frame |
| 961 | Handle coupling. Used when handles are to be fitted on both sides in a dual frame |

Comment

- These specifications must be included in all orders;
- Curved right or left handle alt. straight right or left handle
 - 8 mm square steel spindle, 53 alt. 93 mm length



17911 / 17912



Pull Handle 417-M 10

Recommended application

Facilitate the closing of doors in public environments, e.g. toilet doors.

Features

- Fixed mounting, doesn't affect handle or lock
- Mounted horizontally on the door according to picture
- Delivered in parts which enables adaptation to right or left door
- The pull handle can be shortened to suit narrower doors than Modular 10
- Finish: Bright chrome

Function

A complete handle package includes:

- 1 bright chrome pull handle with a length suitable for a Modular 10-door.
- 2 fittings in die-cast aluminium (silumin), black epoxy painted
- 1 screw for attachment of the holder that are to be mounted under the clip-on rose



130, 131

Recommended application

A simple pull handle for cabinets, sliding doors etc.

Features

- Material: Brass
- Finish: Bright chrome, polished brass or miralloy
- Attached with wood screws
- Bolt-through fixing is available for door thicknesses 34-62 and 60-82 mm
- Measurements, see page 97



130

131



8630, 8631, 8632

Recommended application

Simple pull handles with smooth shapes that are recommended for rough environments such as public places and institutions. The stainless material is highly resistant to corrosion and severe air pollutants and is recommended for use in environments with vast hygienic requirements.

Features

- All visible parts in stainless steel
- Finish: Satin stainless steel
- Concealed fixing
- Available as single or double with bolt-through fixing

Catalogue no.	Tube Ø mm	Length c/c mm
8630-25/300	25	300
8630-31/300	31	300
8630-31/400	31	400
8630-38/300	38	300
8630-38/400	38	400
8631-25/300	25	300
8631-31/300	31	300
8631-31/400	31	400
8631-38/300	38	300
8631-38/400	38	400
8632-25/300	25	300
8632-31/300	31	300
8632-31/400	31	400



8630



8631



8632



137



138

137, 138

Recommended application

Two beautiful pull handles with a classic design. With their simple and harmonious design they suit both modern and older select doors. The pull handles are in the same style as Assa lever handle 6616.

Features

- Material: Brass
- Finish: Polished brass, bright chrome or miralloy
- Available as single or double with bolt-through fixing
- Available in three lengths: 160, 250 and 400 mm
- Door thickness should be 8-80 mm for length 160 and 8-95 mm for lengths 250 and 400
- Support bracket 039 is recommended for wooden doors
- A special fitting set is used for fixing in glass doors
- Measurements, see page 97



325



326

325, 326

Recommended application

Two beautiful curved pull handles with influences from the functionalism. Their simple design suits nearly any door.

Features

- Material: Brass
- Finish: Polished brass, bright chrome or miralloy
- Available as single or double with bolt-through fixing
- Support bracket 039 is recommended for wooden doors
- For door thickness 25-110 mm
- Available in two lengths: 250 and 300 mm
- A special fitting set is used for fixing in glass doors
- Measurements, see page 97



342, 343

Recommended application

The design of these two push handles is perfect for innovative architecture as well as for architecture with cubistic influences of the 1960's and 1970's.

Features

- Material: Brass
- Finish: Polished brass, bright chrome or miralloy
- Available as one- or two-sided with through-going fixing screws for door thickness 25-110 mm
- Available in two lengths: 300 and 400 mm
- Support bracket 040 or 041 is recommended for wooden doors
- A special fitting set is used for fixing in glass doors
- Measurements, see page 97



327

Recommended application

This is the result of a re-thought within the art of designing pull handles. The shape of the handle fades from circular in both ends to a grip-friendly elliptical image over the middle. A true success!

Features

- Material: Brass
- Finish: Polished brass, bright chrome or miralloy
- Available as one- or two-sided with through going fixing screws for door thickness 25-110 mm
- Length: 250 mm
- Support bracket 040 is recommended for wooden doors
- A special fitting set is used for fixing in glass doors
- Measurements, see page 97






The Assa product range is continuously improving.

Please visit our homepage www.assa.se
for the latest information
regarding our product range.



Lever Handle Measurements


Measurements in millimeter



Model	L	U	Diameter
Assa 1899	109	78	
Assa 1918	114	79	
Assa 1930	130	62	
Assa 1956	111	69	
Assa 1905	114	72	
Assa 1923	118	74	
Assa 1935	106	64	
Assa 1949	112	65	
Assa 640	110	55	
Assa 696	106	55	
Assa 6616	129	59	16
Assa 6638	121	60	
Assa 6640	110	55	
Assa 6647	120	57	
Assa 6696	106	55	
Assa 5602	108	46	
Assa 5614	115	48	
Assa 7802	200	59	
Assa 8650	137	80	20
Assa 8665	135	71	20
Assa 408	101	62	
Assa 8670	142	87	20
Assa 8680	130	65	20
Assa 8685	144	80	20
Assa 8690	164	60	20
Assa 167		56	50
Assa 496		40	50
Assa Support	177	75	
Assa 621 Båstad	96	74	
Assa 623 Enskede	111	71	
Assa 626 Gåshaga	125	70	
Assa 73 Vinga	136	59	
Assa 6670	121	53	
Assa 6680	115	52	
Assa 6611	117	47	

Pull Handle Measurements

Measurements in millimeter



Model	L	U	Diameter
Assa 8630	300	80	25
	300	85	31
	300	100	38
	400	85	31
	400	100	38
Assa 8631	300	85	25
	300	90	31
	300	100	38
	400	90	31
	400	100	38
Assa 8632	300	80	25
	300	85	31
	400	85	31
Assa 130	92	50	8
	138	60	12
	188	65	12
Assa 131	138	56	12
	188	58	12
Assa 137	160	60	16
	250	77	20
	400	77	20
Assa 138	160	60	16
	250	77	20
	400	77	20
Assa 325	250	87	25
Assa 326	300	92	30
Assa 417		67	19
Assa 327	250	87	25
Assa 342	300	85	25
	400	90	30
Assa 343	300	85	25
	400	90	30



Cylinder Accessories for Assa Oval Cylinders

256, 2256, 2356, 9256, 18 256

Field of application

Cylinder accessories for interior and exterior locking.

Features

- Material: Brass
- Fits Assa oval single cylinders
- Available in several decorative finishes
- Thumbturn rose is available in the Epok series
- Height of the cylinder ring and length of the screws and thumbturn follower are chosen according to the door thickness
- 9256 is available with thumbturn adjusted for easier opening and can be fixing on lock cases with 90° thumbturn rotation
- 256 is available with a micro switch for opening indication

Function

- Thumbturn for operating bolt and / or latch
- The cylinder ring obstructs damage to the cylinder




256



256E



256 M6



2256



2356



9256



18256

- 256 / 256E: Accessories for single cylinder and thumbturn. 256E thumbturn from Epok series.

- 256 M6: Accessory for single cylinder and thumbturn with a micro switch

- 2256: Accessory for cylinder on the inside and cover plate on the outside

- 2356: Accessory for cylinder on the outside and cover plate on the inside

- 9256: Accessory for single cylinder and extended thumbturn for disabled individuals

- 18256: Accessory for oval double cylinder



Cylinder Accessories for Assa Euro Profile Cylinders

18 256 DIN

Field of application

Cylinder accessories for interior and exterior locking.

Features

- Material: Brass
- Fits double euro-profile cylinders
- Available in several decorative finishes

Function

The cylinder ring gives a decorative look and obstructs damage to the cylinder.



Double Cylinder Lock

Accessory set 5761-1 and 5761-3 for Double cylinder lock

Fields of application

This is an accessory set that permits opening by two cylinders that are independent of each other. Suitable in cases when two lock systems or cylinder models must be able to open the same lock.

Features

- Suits lock case Assa 5761
- Fits all oval cylinders of the Assa assortment
- Available with electric strike
- Accessory set 5761-1 contains a cylinder accessory with a special adapter for external lever handle position and an external pull handle. Must be supplemented with an inside handle-half and cylinder accessory 2356 for the cylinder position
- Accessory set 5761-3 contains a double-sided cylinder accessory with a special adapter for external lever handle position and an external dual pull handle.
- Must be supplemented with cylinder accessory 18256 for the cylinder position

Function

- Accessory set 5761-1: The latch bolt of the lock case is pulled open with a key through one of the two external cylinders. From the inside it's opened by the lever handle.
- Accessory set 5761-3: The latch bolt of the lock case is pulled open with a key through one of the two cylinders from both the inside and the outside.



5761-1



5761-3



Cylinder Accessories for Assa Oval Cylinders - Stainless Steel

Assa stainless steel lever handles, pull handles and accessories are ideal for modern public areas such as institutions and offices. The stainless material is resistant to corrosion and strong air pollutants and is recommended for use in environments with high hygienic requirements.

8256RF, 2256RF, 2356RF

Field of application

Cylinder accessories for interior and exterior locking.

Features

- Fits Assa oval single cylinders
- All visible parts in satin brushed stainless steel
- Height of the cylinder ring and length of the screws and thumbturn follower are chosen according to door thickness

Function

- Thumbturn for operating bolt and / or latch
- The cylinder ring obstructs damage to the cylinder
 - 8256 RF Accessory for single cylinder and thumbturn
 - 2256 RF Accessory for cylinder on the inside and blind rose on the outside
 - 2356 RF Accessory for cylinder on the outside and blind rose on the inside



8256RF



2256RF



2356RF



18256RF

18 256RF

Field of application

Cylinder accessory for interior and exterior locking.

Features

- Fits Assa oval double cylinders
- All visible parts in satin brushed stainless steel
- Height of the cylinder ring and length of the screws and thumbturn follower are chosen according to door thickness
- Can be fitted with one-way screws to prevent unauthorized dismantling

Function

The cylinder ring obstructs damage to the cylinder.

- 18256 RF Accessory for oval double cylinder



Cylinder Accessories for Assa Round Cylinders

Cylinder Accessories 3212

Field of application

For perimeter protection and other important doors.

Features

- Fits Assa round double cylinders
- Available in several decorative finishes
- The accessory set (screws and, if necessary, cylinder extensions) are chosen according to the door thickness

Function

Decorative cylinder accessories.

- 3212: Accessory for round double cylinder



3212

Round Thumbturn Cylinder 3211

Field of application

Accessory set with thumbturn function for round cylinders.

Features

- Fits Assa round single cylinders
- Available in several decorative finishes
- The accessory set (screws and, if necessary, cylinder extensions) are chosen according to the door thickness

Function

Cylinder accessories with thumbturn function for decorative fitting.

- 3211: Accessory for round single cylinder and thumbturn



3211

Round Blind Cylinder 3212B

Field of application

Accessory set with a round blind cylinder for perimeter protection and other important doors where key access from the inside only is desired.

Features

- Material: Brass
- Fits Assa inside round cylinders
- The accessory set includes a drill / vandalism proof round blind cylinder to be fitted on the outside of the door plus decorative cylinder accessories
- Blind outside cylinder sleeve
- Available in several decorative finishes
- The accessory set (screws and, if necessary, cylinder extensions) are chosen according to the door thickness

Function

- Cylinder accessories for decorative fitting with key function on the inside only
- Cannot be opened from the outside

- 3212B: Accessory for round single cylinder and round blind cylinder



3212B



Cylinder Accessories for Assa Round Cylinders

Cylinder Accessories 3212 RF



3212RF

Field of application

For perimeter protection as well as for other important doors.

Features

- Fits Assa round double cylinders
- All visible parts in satin brushed stainless steel
- The accessory set (screws and, if necessary, cylinder extensions) are chosen according to the door thickness

Function

Cylinder accessory for decorative fitting.

- 3212RF: Accessory for round double cylinder



3211RF

Round Thumbturn Cylinder 3211RF

Field of application

Accessory set with thumbturn function for round cylinder.

Features

- Fits Assa round single cylinders
- All visible parts in satin brushed stainless steel
- The accessory set (screws and, if necessary, cylinder extensions) are chosen according to the door thickness

Function

Decorative cylinder accessory with thumbturn function.

- 3211RF: Accessory for round single cylinder and thumbturn function



Opening Device Accessories

Note not approved according to EN 179. See page 136-139 for approved accessories.

8560, 8560:2, 8560:4

Field of application

For Assa modular locks 8561 alt. 8562.

8560:2 Recommended for passage doors, two-way opening

8560:4 Recommended in case of frequent opening from the outside

Features

- Two-piece plastic with two connecting break pins
- The plastic dome can be reused by assembling new break pins
- Assembled with two through-going screws at the handle follower
- Bottom plate: 69 mm Ø
- Available in several decorative finishes

Function

When opening, the plastic dome is turned until the break pins snap. The plastic dome is then used to operate the thumbturn and to make exit possible.

- 8560: Opening device accessory for the inside. Cover rose on the outside
- 8560:2: Opening device accessory for the in- and outside
- 8560:4: Opening device accessory for the inside. Pull knob 496 on the outside



8560



8560:2



8560:4

8561

Field of application

For Assa modular locks 8561 and 8562 used in doors at power transformation plants, high voltage plants and similar where possible fire damages can cause difficulties to open the lock using a regular thumbturn.

Features

- Assembled with two through-going screws at the handle follower
- Available in several decorative finishes

Function

Lever handle 640 for the inside, pull knob 496 for the outside. The inside handle always allows exit.



8061

Field of application

For Assa oval cylinder and double latch locks in doors equipped with access control systems to prevent opening via thumbturn. Not recommended for doors in evacuation paths.

Features

- For inside assembling in combination with external oval cylinder
- Assembled with two through-going screws at the handle follower
- A plastic dome is fitted over the thumbturn in order to prevent uncontrolled opening
- The plastic dome can be replaced after opening

Function

- To open the door via the thumbturn, smash in the plastic dome or break it apart
- A broken plastic dome indicates mechanical opening
- After opening, the thumbturn automatically regain initial position





Toilet Accessories

265, 265E, 5265, 9265, 95265, 9565T

Field of application

For institutions and public places.

Features

- Material: Brass
- Fits lock cases Assa 565 and 310-50/70
- Can be opened from the outside
- Available in several decorative finishes
- Model 9265 and 95265 has an extended thumbturn for easier opening
- The length of the screws and the square spindle are chosen according to the door thickness

Function

- 265/265E: Inside thumbturn. 265E with thumbturn and outside indicator from the Epok-series
Red/white indication on the in- and outside
Can be opened from the outside with a screwdriver
- 5265: Inside thumbturn
Red/white indication on the in- and outside
Can be opened from the outside with a panic key
- 9265: Extended thumbturn on the inside for easier opening
Red/white indication on the outside
Can be opened from the outside with a screwdriver
- 95265: Extended thumbturn on the inside for easier opening
Red/white indication on the outside
Can be opened from the outside with a panic key
- 9565T: Locked / opened from the inside by lifting the lever handle upwards and pressing it downwards. "Flip-up"
Red/white indication on the outside
Can be opened from the outside with a screwdriver
Note! When the C-measurement is less than 20 mm a cover plate is needed on the inside, e.g. Assa 4291



265



265E



5265



9265



95265



9565T

Toilet Accessories, Stainless Steel

Toilet Accessories 8265RF

Field of application

For toilet doors in all kinds of environments.

Features

- Fits Assa lock cases 565 och 310-50/70
- Red/white indication on the in- and outside
- All visible parts in satin brushed stainless steel
- The length of the screws and the square spindle are chosen according to the door thickness
- Bolt-through fixing with two screws 5 mm Ø and fixed nipples

Function

- Thumbturn function on the inside
- Can be opened from the outside with a screwdriver



Toilet Accessories, Nord

Toilet Indicator 260

Field of application


Toilet indicator 260 is a toilet accessory of the Nord series intended for interior door locks FAS 2020, ABLOY 2014 and FAS 40T within the residential sector.

Features

- Material: Brass
- Finish: Bright chrome, satin chrome, polished brass and satin brass
- Rose: 52 mm Ø
- Red / white indication on the in- and outside
- Bolt-through fixing with two screws 5/32" Ø and fixed nipples

Function

- Inside thumbturn
- Can be opened from the outside with a screwdriver



Toilet Accessories, Vinga

Asa 7360

Field of application

Asa 7360 is a toilet accessory from the Vinga series intended for the interior door locks FAS 2020, ABLOY 2014, 414 and FAS 40T within the residential sector. When combined with lever handle Assa 73 of the Vinga series the impression of the image is appreciably increased.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome and miralloy
- Bolt-through fixing with two screws, 5 mm Ø, and fixed nipples
- Rose: 52 mm Ø
- * For 40 mm door thickness
- Red / white indication on the in- and outside

Function

- Inside thumbturn
- Can be opened from the outside with a screwdriver.



5614

Field of application


Toilet accessories 5614 is intended for use on light interior doors within the residential sector. We recommended complementing the accessories with handle Assa 5614 from the same series.

Features

- Material: Zinc
- Finish: bright chrome and miralloy
- Rose: 49 mm Ø
- Red / white indication on the in- and outside
- Bolt-through fixing with two screws Ø 4 mm and fixed nipples
- For 40 mm door thickness

Function

- Inside thumbturn
- Can be opened from the outside





Cover Plates for Assa Modular Locks

4265

Field of application

Accessory to cover door preparation for cylinder.

Features

- Material: Brass
- Available in several decorative finishes
- 52 mm Ø



992

Field of application

Accessory to cover door preparation for lever handle.

Features

- Available in several decorative finishes
- Bolt-through fixing with 5 mm Ø screws and nipples
- 52 mm Ø



Key Plate Nord

Key Plate 2995

Field of application

This keyplate of the Nord series is intended for the interior door locks FAS 2020, FAS 40C and ABLOY 2014 within the residential sector.

Features

- Material: Brass
- Finish: Bright chrome, satin chrome, polished brass or satin brass
- Rose: 52 mm Ø
- Bolt-through fixing with two screws 5/32" Ø and fixed nipples



Key Plate Vinga

Asa 7390

Field of application

Asa 7390 is a keyplate of the Vinga series intended for the interior door locks FAS 2020, FAS 40C and ABLOY 2014 within the residential sector. When combined with lever handle Assa 73 of the Vinga series the impression of the image is appreciably increased.

Features

- Material: Zinc alloy
- Finish: Bright chrome, satin chrome or miralloy
- Bolt-through fixing with two screws, 5 mm Ø, and fixed nipples
- Rose: 52 mm Ø
- For 40 mm door thickness



Key Plate 5614

Field of application

Keyplate 5614 is intended for use on light interior doors within the residential sector. We recommend complementing the accessory with handle Assa 5614 from the same series.

Features

- Material: Zinc
- Finish: bright chrome and miralloy
- Bolt-through fixing with two screws, 4 mm Ø, and fixed nipples
- Rose: 49 mm Ø
- For 40 mm door thickness



4289

Field of application

Cover plate for use in combination with auxiliary locks.

Features

- Material: Brass
- Standard width: 70 mm. Height: 175 mm
- Available in several decorative finishes

Function

- Decorative hardware
- Covers existing groundwork when the lock is replaced
- Cover plate for door strengthens accessories 4290



4289

64, 4291, 4291:1, 4294, 4295

Field of application

Cover-/thumbturn plates for the Modular and Evolution lock series.

Features

- Material: Brass
- Standard width: 70 mm. Height: 230 mm
(Also available in 60 mm width and 220mm height)
- Available with and without space for lever handle
- Comes in several decorative finishes
- Available as thumbturn cover plate

Function

- Decorative hardware
- Covers existing groundwork when the lock is replaced
- Cover plate for door strengthens accessory 4292 (70 mm width only)



64/4291



4291-1



4294-60/70

- 64 Cover plate 60 mm, space for cylinder/lever handle
- 4291 Cover plate 70 mm, space for cylinder/lever handle
- 4291-1 Cover plate 70 mm, space for cylinder only
- 4294-70 Thumbturn plate 70 mm, space for cylinder/lever handle
- 4294-60 Thumbturn plate 60 mm, space for cylinder/lever handle
- 4295-70 Plate set 70 mm. Thumbturn / cover plate, space for cylinder / lever handle
- 4295-60 Plate set 60 mm. Thumbturn / cover plate, space for cylinder / lever handle



Decorative Plate, Stainless Steel

4256 RF / 4356 RF

Field of application

Decorative longplate and thumbturn plate that can be combined with a variety of lock functions within the modular lock series plus lever handle and cylinder accessories.

Features

- Material: Stainless steel
- Constructed with two alternative functions; decoration plate alt. thumbturn plate
- Concealed mounting
- Dimensions: 216 x 60 x 3 mm.
- Comment; 4356 RF - inside thumbturn plate for Assa 2000 and 2002

Function

- The plates designed in the spirit of the Epok series makes decorative hardware
- In combination with Assa 2000 or 2002, the thumbturn plate is used for home-convenient locking
- The plate protects the door from damages and also covers existing damages



4256RF



4356RF



Decorative Plate - Epok-series

4299, 4399, 4218, 4318, 4230, 4330, 4256, 4356

Field of applications

Decorative longplate and thumbturn plate that can be combined with a variety of lock functions within the modular lock series plus lever handle and cylinder accessories.

Features

- Material: Brass
- Constructed with two alternative functions; decoration plate alt. thumbturn plate
- Available in several decorative finishes
- Concealed mounting

Function

- The designed plates in the Epok series makes decorative hardware
- In combination with Assa 2000 and 2002, the thumbturn plate is used for home-convenient locking
- The decoration plate protects the door from damages and also covers existing damages

4299 / 4399

The origin of this decoration plate goes back to the turn of the last century. The basic design reflects the national romantic style. In addition, the design is also influenced by Art Nouveau. 4299 / 4399 are primarily designed for use in combination with the Epok lever handle 1899.

Dimensions: 225 x 60 x 3 mm.

Comment; 4399 - inside thumbturn plate for Assa 2000 and 2002.



4299

4399

4218 / 4318

The design of these plates is inspired by buildings representing well-known Swedish architecture. The plate is designed for the Epok lever handle 1918.

Dimensions: 225 x 60 x 3mm.

Comment; 4318 - inside thumbturn plate for Assa 2000 and 2002.



4218

4318

4230 / 4330

The Stockholm exhibition, faith in the future and the machine romance of the 1930's has inspired the design of this plate created for the Epok lever handle 1930.

Dimensions: 225 x 63 x 3 mm.

Comment; 4330 - inside thumbturn plate for Assa 2000 and 2002.



4230

4330

4256 / 4356

The 1950's was the culmination of Swedish design. The discreet elegance of these plates reflects that era and with roots in Swedish tradition it's well-suited for the Epok lever handle 1956 as well as other handles and buildings with the 1950's spirit.

Dimensions: 216 x 60 x 3 mm.

Comment; 4356 - inside thumbturn plate for Assa 2000 and 2002.



4256

4356



Door Reinforcement Accessories



4290

Field of application

Door reinforcement accessory for auxiliary locks.

Features

- Material: Steel
- Standard width: 66 mm. Height: 170 mm
- Assembled with and hardened nipples
- Complement with cover plate 4289 (70 mm width) for a decorative exterior

Function

The bolt-through fixing and the steel plates reinforces the door and increases the ability to resist physical damage.



4292

Field of application

Door reinforcement accessory for Assa Modular and Evolution locks.

Features

- Material: Steel
- Standard width: 66 mm. Height: 230 mm
- Assembled with bolt-through fixing and hardened nipples
- Complemented with cover plate 4291 (70 mm width) alt. 4295-70 for a decorative exterior

Function

The bolt-through fixing and the steel plates reinforces the door and increases the ability to resist physical damage.



Cylinder Accessories - Classic-series, for Narrow Profile Locks

4859, 4959

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome
- Fits Assa oval single cylinders
- Height of the cylinder ring and length of the screws and thumbturn follower are chosen according to door thickness
- Suits narrow profile latch locks

Function

The cylinder ring obstructs damage to the cylinder.

- 4859: With thumbturn plate and cylinder plate for the outside
- 4959: With thumbturn plate and blind plate without cylinder opening



4859



4959

4159, 4359, 4459

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome
- Fits Assa oval double or single cylinders
- Height of the cylinder ring and length of the screws and thumbturn follower are chosen according to door thickness
- Suits narrow profile latch locks

Function

- The cylinder ring obstructs damage to the cylinder
- Blind plate is available for one-way cylinder function
- 4159: With blind plate and cylinder plate for the outside
- 4359: With blind plate and cylinder plate for the inside
- 4459: For fitting double cylinder



4159



4359



4459



Cylinder Accessories - Classic-series, for Narrow Profile Locks

5859, 5959

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome
- Fits Assa oval single cylinders
- Height of the cylinder ring and length of the screws and thumbturn follower are chosen according to the door thickness

Function

- The cylinder ring obstructs damage to the cylinder
- With handle function
 - 5859: With handle and thumbturn plate for the inside and handle plate with cylinder for the outside
 - 5959: With handle and thumbturn plate for the inside and handle plate without cylinder for the outside



5859



5959



Cylinder Accessories - Classic-series, for Narrow Profile Locks

5059, 5159, 5359, 5459

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome
- Fits Assa oval single and double cylinders
- Height of the cylinder ring and length of the screws and thumbturn follower are chosen according to the door thickness
- Suits narrow profile handle and cylinder latch locks

Function

- The cylinder ring obstructs damage to the cylinder
- Blind plate is available for one-way cylinder function
- With handle function
 - 5059: With handle plates without cylinder opening
 - 5159: With handle for the inside and handle plate with cylinder opening for the outside
 - 5359: With lever handle and cylinder plate for the inside and handle plate without cylinder opening for the outside
 - 5459: With handle plates for fitting double cylinder





Opening Accessories for Narrow Profile Locks, Classic-series

8362

Field of application

For narrow profile lock 1380, 1385 and 13 585 in doors with narrow frame profiles and equipped with access control system to prevent opening via thumbturn.

Features

- Material: Zinc
- Finish: Bright chrome
- For inside assembling in combination with external Assa oval cylinder
- Assembled with four through-going screws
- A plastic cover is fitted over the thumbturn in order to prevent uncontrolled opening
- The plastic cover can be replaced after opening
- Not recommended for doors in evacuation paths

Function

- To open the door, smash in the plastic cover or break it apart
- A broken plastic cover indicates mechanical opening
 - 8362 *Complete* Inside plate with opening device accessory and cylinder plate for the outside
 - 8362 *Opening accessory* Inside plate with opening device accessory





Opening Accessories S3 for Narrow Profile Locks, Classic-series

88362/S3

Field of application

For narrow profile lock 1380, 1385 and 13 585 in doors with narrow frame profiles and equipped with access control system, to prevent opening via thumbturn.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- For inside assembling in combination with external Assa oval cylinder
- Assembled with four through-going screws
- A plastic cover is fitted over the thumbturn in order to prevent uncontrolled opening
- The plastic cover can be replaced after opening
- Not recommended for doors in evacuation paths

Function

- To open the door, smash in the plastic cover or break it apart
- A broken plastic cover indicates mechanical opening

- 88362/S3 Complete: Inside plate with opening device accessory and cylinder plate for the outside
- 88362/S3 Opening accessory: Inside plate with opening device



Opening Accessories S4 for Narrow Profile Locks, Evolution-series

88362E/S4

Field of application

For narrow profile lock 231 and 232 in the Evolution series for doors with narrow frame profiles and equipped with access control system.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- For inside assembling in combination with external Assa oval cylinder
- Assembled with four through-going screws
- A plastic cover is fitted over the thumbturn in order to prevent uncontrolled opening
- The plastic cover can be replaced after opening
- Not recommended for doors in evacuation paths

Function

- To open the door, smash in the plastic cover or break it apart
- A broken plastic cover indicates mechanical opening
- 88362E/S4 Complete: Inside plate with opening device accessory and cylinder plate for the outside
- 88362E/S4 Opening accessory: Inside plate with opening device accessory





Cylinder Accessories S3 for Narrow Profile Locks, Classic-series

44159, 44459

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- Length of the screws and thumbturn follower are chosen according to the door thickness
- Suits narrow profile cylinder latch locks

Function

- Blind plate is available for one-way cylinder function
 - 44159 With blind plate and cylinder plate
 - 44459 For fitting double cylinder



44159



44459

44859, 44959

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- Length of the screws and thumbturn follower are chosen according to the door thickness
- Suits narrow profile cylinder latch locks

Function

- 44859 With thumbturn plate and cylinder plate
- 44959 With thumbturn plate and blind plate



44859



44959



Cylinder Accessories S3 for Narrow Profile Locks, Classic-series

55059, 55159, 55459

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- Length of the screws and thumbturn follower are chosen according to the door thickness
- Suits narrow profile cylinder latch locks

Function

- Blind plate is available for one-way cylinder function
- Handle function with return spring
 - 55059: With handle plates and without cylinder opening
 - 55159: With handle plate and handle plate with cylinder opening
 - 55459: With handle plates for fitting double cylinder



55059



55159



55459

55859, 55959

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- Length of the screws and thumbturn follower are chosen according to the door thickness
- Suits narrow profile cylinder latch locks

Function

- Blind plate is available for one-way cylinder function
- Handle function with return spring
 - 55859: With handle and thumbturn plate plus handle plate with cylinder opening
 - 55959: With handle and thumbturn plate plus handle plate without cylinder opening



55859



55959



Cylinder Accessories S4 for Narrow Profile Locks, Evolution-series

44159E, 44459E

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- Length of the screws and thumbturn follower are chosen according to the door thickness
- Suits narrow profile Evolution cylinder locks with 35 mm backset

Function

- Blind plate is available for one-way cylinder function
 - 44159E: With blind plate and cylinder plate
 - 44459E: For fitting double cylinder



44159E



44459E

44859E, 44959E

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- Length of the screws and thumbturn follower are chosen according to the door thickness
- Suits narrow profile Evolution cylinder locks with 35 mm backset

Function

- 44859E: With thumbturn plate and cylinder plate
- 44959E: With thumbturn plate and blind plate



44859E



44959E

Distance Plate S4 ROT

Field of application

Used when a 28 mm backset lock case is replaced by one with 35 mm.

Features

- Material: Stainless steel
- Finish: Satin steel
- Distance plate thickness: 1,5 mm

Function

The distance plate covers existing groundwork on the door when a 28 mm backset narrow profile lock case is replaced by a 35 mm backset lock case of the Evolution series.





Cylinder Accessories S4 for Narrow Profile Locks, Evolution-series

55059E, 55159E, 55459E

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- Length of the screws and thumbturn follower are chosen according to the door thickness
- Suits narrow profile Evolution cylinder locks with 35 mm backset

Function

- Blind plate is available for one-way cylinder function
- Handle function with return spring
 - 55059E: With handle plates without cylinder opening
 - 55159E: With handle plate and handle plate with cylinder opening
 - 55459E: With handle plates for fitting double cylinder



55059E



55159E



55459E

55859E, 55959E

Field of application

Decorative cylinder accessories for interior and exterior locking.

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- Length of the screws and thumbturn follower are chosen according to the door thickness
- Suits narrow profile Evolution cylinder locks with 35 mm backset

Function

- Blind plate is available for one-way cylinder function
- Handle function with return spring
 - 55859E: With handle and thumbturn plate plus handle plate with cylinder opening
 - 55959E: With handle and thumbturn plate plus handle plate without cylinder opening



55859E



55959E



High Security Accessories for Narrow Profile Locks, Classic-series

4559, 4659, 4759

Field of application

For night-time locking of shops, department stores, offices etc.

Features

- Material: Steel
- Finish: Bright chrome
- Fits Assa oval single or double cylinders
- Suits narrow profile lock Assa 13787
- Assembled with 3 hardened steel bolts and 3 one-way screws plus hardened nipples
- Can be complemented with 2 mm or 4 mm distance plates to fit different door thicknesses

Function

- The cylinder accessories prevents damage on the cylinder in case of an attack
- The bolt-through fixing and the steel plates reinforces the door and increases the ability to resist physical damage
 - 4559: For double cylinder
 - 4659: For single cylinder, outside assembling only
 - 4759: For single cylinder, inside assembling only



4559



4659



4759



High Security Accessories for Narrow Profile Locks, Evolution-series

4559E, 4659E, 4759E, 5559E, 5659E, 5759E

Field of application

For night-time locking of shops, department stores, offices etc.

Features

- Material: Steel
- Finish: Bright chrome
- Fits Assa oval single or double cylinder
- Suits mechanical and motorised narrow profile Evolution locks with hook bolt
- Assembled with 3 hardened steel bolts and 3 one-way screws plus hardened nipples
- Can be complemented with 2 mm or 4 mm distance plates to fit different door thicknesses
- 4559E, 4559E RC, 4659E RC, 4759E and 4759E RC can also be assembled with motor lock Assa 811-35

Function

- The cylinder accessories prevents damage on the cylinder in case of an attack
- The bolt-through fixing and the steel plates reinforces the door and increases the ability to resist physical damage

- 4559E: For double cylinder. They suit modular lock Assa 811-35
- 4659E: For single cylinder, outside assembling only. They suit modular lock Assa 811-35
- 4759E: For single cylinder, inside assembling only. They suit modular lock Assa 811-35
- 5559E: For double cylinder, with handle
- 5659E: For single cylinder, outside assembling only, with handle
- 5759E: For single cylinder, inside only assembling, with handle



4559E



4659E



4759E



5559E



5659E



5759E



Thumbturn Accessories for Motor Locks, Modular

Thumbturn Adapter 257

**Field of application**

For motor lock Assa 8000S and Assa 8001S in combination with cylinder accessory 256.

Features

- Finish: Bright nickel
- Complements cylinder accessory 256, assembled under the thumbturn
- Built-in return spring in the thumbturn washer

Function

When the thumbturn is turned for opening the return spring tightens, the tightened spring then brings the thumbturn into the initial position when released.

Thumbturn Cylinder, Round

**Field of application**

For motor locks in combination with Assa round outside cylinder. Can just as suitably be used with other Assa Modular or Evolution lock cases with 50 mm back set.

Features

- Used as thumbturn in combination with an outside round cylinder
- Built-in, magnetic return mechanism for automatic and smooth regain of initial thumbturn position
- Used in combination with Assa accessory 3212

Function

When the thumbturn is turned for opening the magnetic return mechanism brings the thumbturn back to its original position.

Thumbturn Cylinder, Oval

**Field of application**

Primarily designed for motor locks in combination with Assa oval outside cylinder. Can just as suitably be used with other lock cases with 35 or 50 mm back set that have a 360°-key turning function, such as the Assa 8765 and Assa 410 lock cases.

Features

- Used as thumbturn in combination with an outside oval cylinder
- Built-in, magnetic return mechanism for automatic and smooth regain of initial thumbturn position

Function

When the thumbturn is turned for opening the magnetic return mechanism brings the thumbturn back to its original position.



Opening Device Accessories for Motor Locks, Modular

Opening Device Accessory 8060

Field of application

For motor locks 8000S and 8001S.

Features

- For inside assembling in combination with an external Assa oval cylinder
- A plastic dome is fitted over the thumbturn in order to prevent uncontrolled opening
- The plastic dome can be replaced after opening
- Not recommended for doors in evacuation paths

Function

- To open the door via the thumbturn, smash in the plastic dome or break it apart
- A broken plastic dome indicates mechanical opening

The thumbturn has a holding mechanism that keeps the motor lock in an unlocked position after opening. This function must be mechanically restored to put the device in operation after opening.





Opening Device Accessories for Narrow Profile Motor Locks, Evolution

Opening Device Accessory 84562E

Field of application

Opening device accessory for the motorised narrow profile hookbolt lock Assa 811S-35 in the Evolution series.

Features

- Material: Steel
- Finish: Bright chrome
- For inside assembling in combination with an external Assa oval cylinder
- Thumbturn cylinder with a thumbturn for the inside is included
- A plastic cover is mounted fixed over the thumbturn
- Assembled with 3 hardened steel bolts and 3 one-way screws plus hardened nipples
- Standard for 65 mm door thickness with the lock case assembled in the center
- Can be complemented with 2 mm or 4 mm distance plates to fit different door thicknesses
- Not recommended for doors in evacuation paths

Function

To open the door via the thumbturn, smash in the plastic dome or break it apart.

- 84562: Inside plate with opening device accessory and cylinder plate for the outside
- 84562:1 Inside plate with opening device accessory
- 84562:2 Opening device accessory only



Opening Device Accessories for Narrow Profile Motor Locks, Classic

Opening Device Accessory 84562

Field of application

For hook bolt lock Assa 8087S. For inside assembling in combination with an external oval cylinder.

Features

- Material: Steel
- Finish: Bright chrome
- For inside assembling in combination with an external Assa oval cylinder
- Thumbturn cylinder with a thumbturn for the inside is included
- A plastic cover is mounted fixed over the thumbturn
- Assembled with 3 hardened steel bolts and 3 one-way screws plus hardened nipples
- Standard for 65 mm door thickness with the lock case assembled in the center
- Can be complemented with 2 mm or 4 mm distance plates to fit different door thicknesses
- Not recommended for doors in evacuation paths

Function

To open the door via the thumbturn, smash in the plastic dome or break it apart.

- 84562: Inside plate with opening device accessory and cylinder plate for the outside
- 84562:1 Inside plate with opening device accessory
- 84562:2 Opening device accessory only





High Security Accessories for Narrow Profile Motor Locks, Classic

84559, 84659, 84759

Field of application

For night-time locking of shops, department stores, offices etc. in combination with hook bolt motor lock Assa 8087S.

Features

- Material: Steel
- Finish: Bright chrome
- For Assa narrow profile motor locks
- Assembled with 3 hardened steel bolts and 3 one-way screws plus hardened nipples
- Can be complemented with 2 mm or 4 mm distance plates to fit different door thicknesses

Function

- The cylinder accessories prevents damage on the cylinder in case of an attack
- The bolt-through fixing and the steel plates reinforces the door and increases the ability to resist physical damage
 - 84559: For double cylinder
 - 84659: For single cylinder, outside assembling only
 - 84759: For single cylinder, inside assembling only



84559



84659



84759

Security Accessories for Narrow Profile Locks, Evolution-series, look at page 75.



Miscellaneous Accessories

Wall Key Deposit 390877

Field of application


Wall key deposit for local service keys etc.

Features

- Complemented with cylinder and suitable lever handle for assembling in wall according to the instructions for use
- Available with built-in micro switch for alarm device
- Assembled recessed in the wall at 1,5-2 m height recommended
- Wall key deposit: 45 mm Ø. Length: 137 mm

Can be combined with following cylinders:

Cylinder Twin Pro 6118
Cylinder Twin Global 7618
Cylinder Twin 6518



390877



806193

390877-100 Key deposit tube

390877-130 Key deposit tube with micro-switch

491859 Hardened socket for frontal protection. 51 mm Ø. Length: 25 mm

466646 Fixing plate with bolt and nut. 60 mm Ø

806193 Lock case holder used with oval cylinder, e.g. 6101



Miscellaneous Accessories

Rim Lock Cover 2896

Field of application

For surface mounting of modular locks in thin doors and gates.

Features

- Material: Bright nickel-plated steel
- Can be assembled with screws (ø 6 mm), rivets or by welding
- For symmetrical lock cases in the modular lock case series
- For lock cases with 50 mm backset



Function

Provides surface mounting of modular locks

Automatic Sealing Threshold Assa T 100

Field of application

For fire, smoke and sound isolation in wooden swing doors where a regular threshold cannot be mounted.

Features

- Flush mounting on the lower edge of the door or with a surface mounting list
- Available in several lengths as standard and can easily be adapted to doors between 288 mm to 1324 mm, other lengths can be ordered
- Easy to adjust for floor chinks 5-20 mm
- When flush mounted it's approved for fire resisting doors class EI 30
- When flush mounted it's approved for RW 30 dB if mounted in 35 dB door
- Minimum of 2 million openings
- Suits both right and left doors

Function



- When the door is closed and the adjustable pin meets the door frame, the sealing threshold is lowered quickly and silently against the floor. When the door is opened and the adjustable pin leaves the door frame, the mechanism lifts the sealing list immediately so that it doesn't scrape the floor during opening.
- The sealing threshold is designed to level automatically if the floor slopes and to function silently.

Accessories

Strikes for the short ends of the sealing threshold.

Aluminium strip for surface mounting.

Note! Not approved for fire and sound classification.

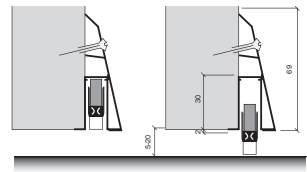

External mounting strip made of aluminium



Asa Support-series

Field of application

Exit devices with ergonomic design that facilitate the opening of doors and windows for all, especially people with various grades of disability

Lever Handle Support

Features

- Material: Zinc
- Finish standard: Miralloy (nickel proof)
- Fits all Assa modular locks, inner door locks and all lock cases with fixings that are 30° offset from the horizontal

Function

- Built-in return spring maintain to keep the lever handle in the right position
- Assembled with through-going M5 screws and nipples
- Standard for door thicknesses 40-57 mm and 58-75 mm
- Recommended lock case: Assa 565 HD



Door Thumbturn Support

Features

- Material: Zinc
- Finish standard: Miralloy (nickel proof)
- Fits Assa standard assortment of cylinder- and toilet accessories in the modular lock series

Function

Only recommended for lock cases with 90° cylinder turn, e.g. Assa 565 HD.



Window Handle Support

Features

- Material: Zinc
- Finish standard: Miralloy (nickel proof)
- Fits window espagnolettes, e.g. Fix

Function

- Built-in support spring to facilitate opening and closing manoeuvres
- Assembled with enclosed wood screws





Climate Protection

Field of application

Ideal for gates and doors in demanding environments. Protects the cylinder against e.g. rain, snow and dust.

Features

- Material: Stainless steel and rubber
- Suits Assa round and oval cylinders

Function

- Assembled under the cylinder ring
- Pre-drilled holes for fixing screws or welding



Door Stops

Field of application

Door stops for wall or floor mounting to prevent the door from causing damage. The door stops have a thought out design and are made of stainless steel which guarantees a long life and high quality.


Features

- Finish: Satin brushed stainless steel and black rubber
- Mounted on the wall or floor with enclosed screws

Function

- Prevents the door from causing damage
- Facilitates floor cleaning when mounted on wall

- 25 mm - floor mounted, \varnothing 45 mm
- 55 mm - floor mounted, \varnothing 20 mm
- 70 mm - wall mounted, Rose: \varnothing 50 x 5 mm
- 45 mm - floor mounted, Rose: \varnothing 50 x 5 mm
- 75 mm - wall or floor mounted, Rose: \varnothing 50 x 5 mm

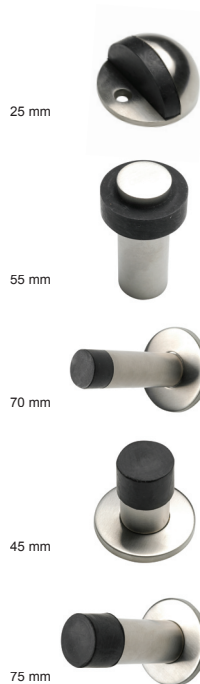



Panic Exit Device

Assa Panic Exit Device 1125

Field of application

Panic exit device for outgoing hinged door. Combined with a Assa flush lock case 1525 or 1526 with 50 mm backset. Ideally suited for emergency escape doors in shopping malls, hotels, schools, hospitals, theatres, arenas etc. where panic can arise during evacuation.

Features

- Panic exit device with horizontal pushbar
- A muntin bar is needed when mounted
- Certificated and CE approved according to the European Standard EN 1125 and Construction Products Directive 89/106/EEG
- Approved for mounting in fire resisting doors up to and including class E/EI60
- Available in various lengths for various door module dimensions

- 1125 M8 For door leaf width; 670-815 mm
- 1125 M9-10 For door leaf width; 816-1010 mm
- 1125 M11-14 For door leaf width; 1011-1300 mm

- All visible parts in satin brushed stainless steel
- Available in left or right suited versions
- Fits cylinder kit Assa 725, 4625, 4825, 5625, 5825, 6525 and 7625

Function

- The door can always be opened from the inside by using the panic exit device
- Micro-switch function indicates use of the panic exit device
- Authorised passage by key from both the inside and the outside is always possible
- With a handle on the outside of the door it's possible to regain entry

Accessory 3325 and 3425 for Panic Exit Device Assa 1125

Field of application

Accessory for decorative and functional mounting in combination with panic pushbar Assa 1125 and lock case Assa 1525 alt 1526.

Features

- Material: Brass
- For assembling with cylinder types: Assa 725, 4625, 4825, 5625, 5825, 6525 alt. 7625
- Available in several decorative finishes

Function

Accessory for decorative and functional mounting

- 3325: Decorative cylinder socket and round cylinder ring. Lever handle Assa 6696 for the outside. The external handle on the door makes it possible to regain entry.
- 3425: Decorative cylinder socket and round cylinder ring. Cover plate for outside lever handle space. After opening the door return to locked position and cannot be opened from the outside without key.



All products are certified and CE approved according to the European Standard EN 179 or EN 1125 and Construction Products Directive 89/106/EEG

Plaesee see our webpage: www.assa.se



3325



3425




Lock Case Evolution for Panic Exit Device Assa 1125

Lock case 740-50, -70:

- Lock case with hookbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle
- Lever handle latchbolt keeps the door closed in case of fire
- Can be combined with electric strike STEP 18/28
- Available with ME micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with panic exit device Assa 1125



740-50



New latch bolt design for decreased opening force

Lock case 761-50, -70:

- Lock case with interlocked cylinder latchbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle in combination with the electric strike which automatically switches to an unlocked position after indication from the fire alarm or evacuation alarm
- Lever handle latchbolt keeps the door closed in case of fire
- Cylinder latchbolt, lockable into lock case with lock-back key
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with panic exit device Assa 1125



761-50

Lock case 762-50, -70:

- Lock case with interlocked cylinder latchbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle in combination with the electric strike which automatically switches to an unlocked position after indication from the fire alarm or evacuation alarm
- Lever handle latchbolt keeps the door closed in case of fire
- Cylinder latch bolt not lockable into lock case
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with panic exit device Assa 1125



762-50

Lock case 767-50, -70:

- Lock case with interlocked cylinder latchbolt and lever handle latchbolt
- After opening no re-locking of cylinder latch gives possibility for re-entrance. Reset by cylinder function.
- Lever handle latchbolt keeps the door closed in case of fire
- Can be combined with electric strike SOLID Standard, for example 575
- Available with ME micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with panic exit device Assa 1125



767-50

Lock case 772-50, -70:

- Lock case with interlocked cylinder latchbolt
- Cylinder latchbolt keeps the door closed in case of fire
- Cylinder latch bolt not lockable into lock case
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with panic exit device Assa 1125



772-50



Panic Exit Device

Assa Panic Exit Device 1125:1

Field of application

Panic exit device used for passive door leaf of outgoing modular profile double doors. Ideally suited for emergency escape doors in shopping malls, hotels, schools, hospitals, theatres, arenas etc. where panic can arise during evacuation.

Features

- Panic exit device with horizontal pushbar
- Certificated and CE approved according to the European Standard EN 1125 and Construction Products Directive 89/106/EEG
- Approved for mounting in fire resisting doors up to and including class E/EI 60
- Available in different lengths for different door module dimensions:
 - 1125 M8 For door leaf width; 670-815 mm
 - 1125 M9-10 For door leaf width; 816-1010 mm
 - 1125 M11-13 For door leaf width; 1011-1300 mm
- All visible parts in satin brushed stainless steel
- Available in left or right suited versions
- Operates by vertical rods and externally placed deadlocked latches
- Maximum height of door leaf is 2130 mm. With an extension set the maximum height of the door leaf extends to 3100 mm

Function

- The passive door leaf can be opened from the inside irrespective of the active door leaf by using the pushbar
- Micro-switch function indicates use of the panic exit device

All products are certified and CE approved according to the European Standard EN 179 or EN 1125 and Construction Products Directive 89/106/EEG

Please see our webpage: www.assa.se

The Assa product range is continuously improving.

Please visit our homepage www.assa.se
for the latest information
regarding our product range.



Doorguide Assa 2010

Application

For dual doors in fire cell with door coordinator.

Features

- Material: Steel
- Jointed function with roll-wheel of steel

Function

- Mounted on upper side of passive door leaf on door in fire cell equipped with door coordinator
- Supports safe closing after exit through an opening function of the active door leaf triggered by the opening of the passive door leaf, which ensures that the door leaves closes in the right order and fireproof enclosure is provided





Assa Panic Exit Device 1130



Field of application

Panic exit device for outgoing modular or narrow profile doors. To be combined with a flush exit lock device Assa 1326 for panic pushbars. Ideally suited for emergency escape doors in shopping malls, hotels, schools, hospitals, theatres, arenas etc. where panic can arise during evacuation.

Features

- Panic exit device with horizontal pushbar
- Certificated and CE approved according to the European Standard EN 1125 and Construction Products Directive 89/106/EEG
- Approved for mounting in fire resisting doors up to and including class E/EI60
- Pushbar available in two alternative lengths for different door widths;
 - Pushbar 900 mm
 - Pushbar 1150 mm
- The pushbar is easily cut to fit the actual width of the door leaf
- Pushbar and cover parts are made of satin brushed stainless steel
- Available in left or right suited versions
- Can be combined with accessories from Assa S4 narrow profile assortment for the outside of the door

Function

- The door can always be opened from the inside by using the pushbar
- Micro-switch indicates use of pushbar
- Authorized passage by key from outside is always possible
- With an external handle on the door it's possible to regain entry

All products are certified and CE approved according to the European Standard EN 179 or EN 1125 and Construction Products Directive 89/106/EEG

Please see our webpage: www.assa.se

Assa Panic Exit Device 1130:1



Field of application

Panic exit device used for passive door leaf of outgoing narrow profile double doors. Ideally suited for emergency escape doors in shopping malls, hotels, schools, hospitals, theatres, arenas etc. where panic can arise during evacuation.

Features

- Panic exit device with horizontal pushbar
- Certificated and CE approved according to the European Standard EN 1125 and Construction Products Directive 89/106/EEG
- Approved for mounting in fire resisting doors up to and including class E/EI60
- Pushbar available in two alternative lengths for different door widths;
 - Pushbar 900 mm
 - Pushbar 1150 mm
- The pushbar is easily cut to fit the actual width of the door leaf
- Pushbar and cover parts are made of satin brushed stainless steel
- Available in left or right suited versions
- Operates by vertical rods and externally placed latches
- Maximum height of door leaf is 2130 mm. With an extension set the maximum height of the door leaf extends to 3100 mm

Function


- The passive door leaf can be opened from the inside irrespective of the active door leaf by using the pushbar
- Micro-switch function indicates use of the panic exit device



Lock Case Evolution for Panic Exit Device Assa 1130

Lock case 740-35, -50, -70:

- Lock case with hookbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle
- Lever handle latchbolt keeps the door closed in case of fire
- Can be combined with electric strike STEP 18/28
- Available with ME micro switch for indication of locked/unlocked hookbolt plus indication of use of the panic exit device
- Authorized opening with key via the cylinder
- Intended for use with panic exit device Assa 1130



New latch bolt design for decreased opening force


Lock case 761-35, -50, -70:

- Lock case with interlocked cylinder latchbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle in combination with the electric strike which automatically switches to an unlocked position after indication from the fire alarm or evacuation alarm
- Lever handle latchbolt keeps the door closed in case of fire
- Cylinder latchbolt lockable into lock case with lock-back key
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG micro switch for indication of locked/unlocked hookbolt plus indication of use of the panic exit device
- Authorized opening with key via the cylinder
- Intended for use with panic exit device Assa 1130




Lock case 762-35, -50, -70:

- Lock case with interlocked cylinder latchbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle in combination with the electric strike which automatically switches to an unlocked position after indication from the fire alarm or evacuation alarm
- Lever handle latchbolt keeps the door closed in case of fire
- Cylinder latch bolt not lockable into lock case
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG micro switch for indication of locked/unlocked hookbolt plus indication of use of the panic exit device
- Authorized opening with key via the cylinder
- Intended for use with panic exit device Assa 1130




Lock case 767-35, -50, -70:

- Lock case with interlocked cylinder latchbolt and lever handle latchbolt
- After opening no re-locking of cylinder latch gives possibility for re-entrance. Reset by cylinder function.
- Lever handle latchbolt keeps the door closed in case of fire
- Can be combined with electric strike SOLID Standard, for example 575
- Available with ME micro switch for indication of locked/unlocked hookbolt plus indication of use of the panic exit device
- Authorized opening with key via the cylinder
- Intended for use with panic exit device Assa 1130



Lock case 772-35, -50, -70:

- Lock case with interlocked cylinder latchbolt
- Cylinder latchbolt keeps the door closed in case of fire
- Cylinder latch bolt not lockable into lock case
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG micro switch for indication of locked/unlocked hookbolt plus indication of use of the panic exit device
- Authorized opening with key via the cylinder
- Intended for use with panic exit device Assa 1130





Emergency Exit Device Assa 179

Field of application

Assa 179 series is intended for hinged modular doors in escape paths where no special exit routines are set. The lock is operated by a one-hand grip which provides a safe exit. The 179-series offers several types of lock cases which provides functional solutions fit for different demands, for example the need of regain of entry in case of fire and smoke in the escape path.

Features

- Emergency exit device Assa 179 is certified and CE approved according to the European Standard EN 179 and Construction Products Directive 89/106/EEG, and is also approved for mounting in fire resisting doors up to and including class EI 60 (711-50/70 not included)
- The lock case is available with a built-in microswitch which indicates use of the emergency exit handle, and indication for locked/unlocked deadbolt alternative deadlocked latch
- Available in all of Assa's finishes

Function

- The door can always be opened from inside by the emergency exit handle
- Depending on lock case model, regain of entry is possible by outside lever handle
- The lock case models can be used in combination with electric strike STEP 18/28 for integration in access control systems
- Authorized opening with a key is always possible from both in- and outside without affecting the alarm system
- Available with security sealing thread
- The 3 mm distance plate 179 is recommended for doors with a C-measurement less than 22 mm

179A fits the following Assa lock cases:

710-50/70
721-50/70
722-50/70
727-50/70

179B fits the following Assa lock cases:

711-50/70
732-50/70



179A



179A-2



179B



179B-2

The Assa product range is continuously improving.

Please visit our homepage www.assa.se
for the latest information
regarding our product range.



Lock Case Evolution for Emergency Exit Device Assa 179

Lock case 710-50/70

- Lock case with hookbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle
- Lever handle latchbolt keeps the door closed in case of fire
- Can be combined with electric strike STEP 18/28
- Available with ME micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 A



710-50

Lock case 711-50/70:

- Lock case with hookbolt
- No door holding in case of fire
- Can be combined with electric strike STEP 18/28
- Available with ME microswitch for indication if hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 B



711-50

Lock case 721-50/70:

- Lock case with interlocked cylinder latchbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle in combination with the electric strike which automatically switches to an unlocked position after indication from the fire alarm or evacuation alarm
- Lever handle latchbolt keeps the door closed in case of fire
- Cylinder latchbolt, lockable into lock case with lock-back key
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG microswitch for indication if hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 A



721-50

Lock case 722-50/70:

- Lock case with interlocked cylinder latchbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle in combination with the electric strike which automatically switches to an unlocked position after indication from the fire alarm or evacuation alarm
- Lever handle latchbolt keeps the door closed in case of fire
- Cylinder latch bolt not lockable into lock case
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG microswitch for indication if hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 A



722-50

Lock case 727-50/70:

- Lock case with interlocked cylinder latchbolt and lever handle latchbolt
- After opening no re-locking of cylinder latch gives possibility for re-entrance. Reset by cylinder function.
- Lever handle latchbolt keeps the door closed in case of fire
- Can be combined with electric strike SOLID Standard, for example 575
- Available with ME microswitch for indication if hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 A



727-50

Lock case 732-50/70:

- Lock case with interlocked cylinder latchbolt
- Cylinder latchbolt keeps the door closed in case of fire
- Cylinder latch bolt not lockable into lock case
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG microswitch for indication if hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 B



732-50



Emergency Exit Device Assa 179 S4

Field of application

Assa 179 S4 series is intended for hinged narrow profile doors in escape paths where no special exit routines are set. The lock is operated by a one-hand grip which provides a safe exit. The 179 S4 series offers several types of lock cases which provides functional solutions fit for different demands, for example the need of regain of entry in case of fire and smoke in the escape path.

Features

- Emergency exit device Assa 179 S4 is certified and CE approved according to the European Standard EN 179 and Construction Products Directive 89/106/EEG, and is also approved for mounting in fire resisting doors up to and including class EI 60 (711-35 not included)
- The lock case is available with a built-in microswitch which indicates use of the emergency exit handle, and indication for locked/unlocked deadbolt alternative deadlocked latch
- Available in bright chrome or satin chrome

Function

- The door can always be opened from inside by the emergency exit handle
- Depending on lock case model, regain of entry is possible by outside lever handle
- The lock case models can be used in combination with electric strike STEP 18/28 for integration in access control systems
- Authorized opening with a key is always possible from both in- and outside without affecting the alarm system
- Available with security sealing thread
- The 3 mm distance plate S3/S4 is recommended for doors with a C-measurement less than 22 mm

179A S4 fits the following Assa lock cases:

710-35
721-35
722-35
727-35

179B S4 fits the following Assa lock cases:

711-35
732-35



179A S4



179A S4 DC




179A-2 S4



179B S4



179B S4 DC



179B-2 S4



Lock Case Evolution for Emergency Exit Device Assa 179 S4

Lock case 710-35

- Lock case with hookbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle
- Lever handle latchbolt keeps the door closed in case of fire
- Can be combined with electric strike STEP 18/28
- Available with ME micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 S4 A



710-35

Lock case 711-35

- Lock case with hookbolt
- Regain of entry is possible by outside lever handle
- Can be combined with electric strike STEP 18/28
- Available with ME micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 S4 B



711-35

Lock case 721-35

- Lock case with hookbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle in combination with the electric strike which automatically switches to an unlocked position after indication from the fire alarm or evacuation alarm
- Regain of entry is possible by outside lever handle
- Cylinder latchbolt, lockable into lock case with lock-back key
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 S4 A



721-35

Lock case 722-35

- Lock case with hookbolt and lever handle latchbolt
- Regain of entry is possible by outside lever handle in combination with the electric strike which automatically switches to an unlocked position after indication from the fire alarm or evacuation alarm
- Regain of entry is possible by outside lever handle
- Cylinder latch bolt not lockable into lock case
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 S4 A



722-35

Lock case 727-35

- Lock case with hookbolt and lever handle latchbolt
- After opening no re-locking of cylinder latch gives possibility for re-entrance. Reset by cylinder function.
- Regain of entry is possible by outside lever handle
- Can be combined with electric strike SOLID Standard, for example 575
- Available with ME micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 S4 A



727-35

Lock case 732-35

- Lock case with interlocked cylinder latchbolt
- Regain of entry is possible by outside lever handle
- Cylinder latchbolt, lockable into lock case with lock-back key
- Can be combined with electric strike SOLID Standard, for example 575
- Available with MG micro switch for indication if the hookbolt is locked/unlocked plus indication of use of the exit device handle
- Authorized opening with key via the cylinder
- Intended for use with accessory 179 S4 B



732-35



Emergency Exit Device S3 for Narrow Profile Locks, Classic

Emergency Exit Device 88363, 88364, 188363 of Assa S3-series

Field of application

Emergency exit device for narrow profile doors in combination with Assa 1361 flush lock case. Recommended for doors in exit routes where the risk of crowding is low. One-hand opening with a separate exit device handle for emergency exit. The door automatically returns to locked position after opening

Features

- Material: Zinc
- Finish: Bright chrome, satin chrome
- Emergency exit device Assa 179 is certified and CE approved according to the European Standard EN 179 and Construction Products Directive 89/106/EEG, and is also approved for mounting in fire resisting doors up to and including class EI 60
- The lock case is available with built-in microswitch which indicates use of the emergency exit handle
- Available in left or right orientated design
- For assembling in combination with single or double cylinder with cylinder follower
- The length of the screws and cylinder follower are chosen according to the door thickness

Function

- The door can always be opened from inside by the emergency exit handle
- The emergency exit handle push the deadlocked latchbolt into open position
- The cylinder provides authorized opening with key from the in- and outside
- The door can always be opened from the outside when lever handle is mounted
- Regain of entry is guaranteed when lever handle on the outside is mounted
- Available with security sealing thread



88363



88364



188363





Lock Case 1361

Field of application

Lock case for narrow profile doors in escape paths, combined with emergency exit device 88363, 88364, 188363 in the Assa S3 series.

Features

- Comes with a deadlocked bolt and a combined cylinder / lever latch
- Includes a steel handle intended for fire safety doors
- Available in left and right orientated design

Function

- Outside
 - Provides around the clock entrance from the outside when lever handle is mounted
 - Opening of deadlocked bolt with key
- Inside
 - Allows opening from the inside by the panic pushbar which depress the deadlocked bolt
 - Deadlocks automatically at 14 mm extension and with depressed deadlock bolt
 - Impossible to fix the bolt in open position

